



PROTECTIVE COVERS

MIL-DTL-5015

MS25042 / MS25043 STYLE

TR25042 / TR25043



NCAGE CODE: TD589

WWW.ATPSAVUNMA.COM

info@atpsavunma.com

MIL-DTL-5015 PROTECTIVE COVERS


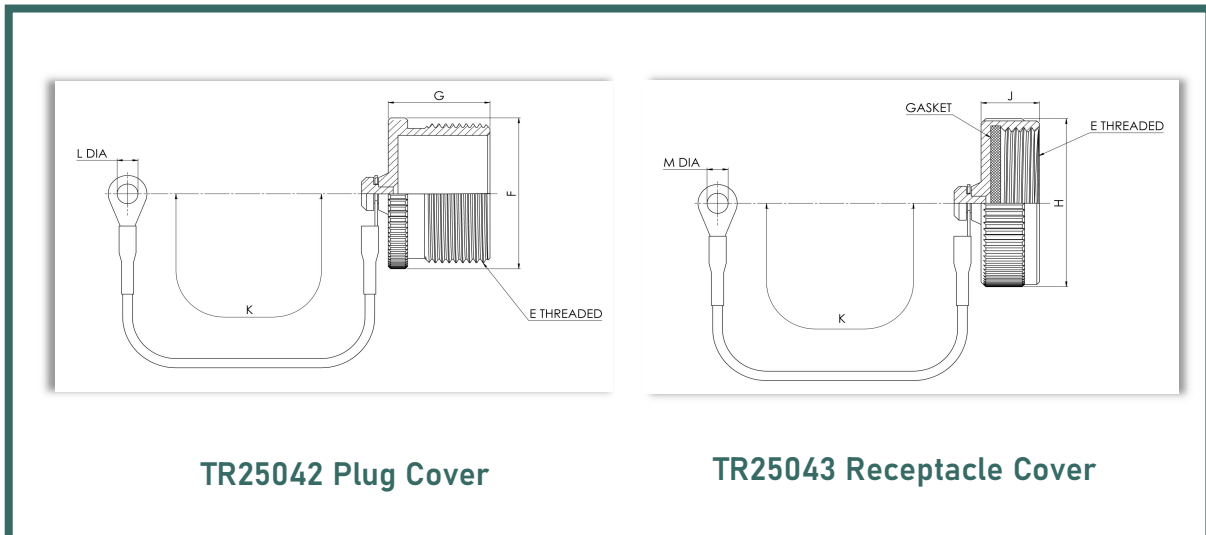


TABLE I: Shell Size, Thread, Attachment and Dimensions

Shell Size	E Thread	F Dia. Max	G Max	H Max	J Max	K Attachment Length (mm)	L Dia Min.	M Dia. Min.
8	1/2- 28 UNEF	14,3 (.562)	16,7 (.656)	17,5 (.688)	11,9 (.469)	101,6 (4.00)	3,8 (.151)	3,4 (.135)
10	5/8- 24 UNEF	17,4 (.687)	16,7 (.656)	20,7 (.815)	11,9 (.469)	101,6 (4.00)	3,8 (.151)	3,4 (.135)
12	3/4- 20 UNEF	20,6 (.812)	21,4 (.844)	25,4 (1.000)	11,9 (.469)	114,3 (4.50)	3,8 (.151)	3,4 (.135)
14	7/8- 20 UNEF	23,8 (.937)	21,4 (.844)	28,6 (1.125)	11,9 (.469)	114,3 (4.50)	3,8 (.151)	3,4 (.135)
16	1 - 20 UNEF	27,0 (1.062)	21,4 (.844)	30,2 (1.118)	11,9 (.469)	114,3 (4.50)	3,8 (.151)	3,4 (.135)
18	1 1/8- 18 UNEF	30,1 (1.187)	21,4 (.844)	34,1 (1.344)	11,9 (.469)	114,3 (4.50)	3,8 (.151)	3,4 (.135)
20	1 1/4- 18 UNEF	33,3 (1.312)	21,4 (.844)	37,3 (1.469)	11,9 (.469)	127,0 (5.00)	4,6 (.182)	3,4 (.135)
22	1 3/8- 18 UNEF	36,5 (1.437)	21,4 (.844)	40,5 (1.594)	11,9 (.469)	127,0 (5.00)	4,6 (.182)	3,4 (.135)
24	1 1/2- 18 UNEF	39,7 (1.562)	21,4 (.844)	43,7 (1.719)	11,9 (.469)	127,0 (5.00)	4,6 (.182)	4,2 (.166)
28	1 3/4- 18 UNS	46,0 (1.812)	21,4 (.844)	50,0 (1.969)	13,5 (.531)	196,9 (7.75)	4,6 (.182)	4,2 (.166)
32	2- 18 UNS	52,4 (2.062)	21,4 (.844)	56,4 (2.219)	13,5 (.531)	196,9 (7.75)	5,4 (.213)	4,6 (.182)
36	2 1/4- 16 UN	58,7 (2.312)	21,4 (.844)	62,7 (2.469)	13,5 (.531)	196,9 (7.75)	5,4 (.213)	4,6 (.182)
40	2 1/2- 16 UN	65,1 (2.562)	21,4 (.844)	69,1 (2.719)	13,5 (.531)	196,9 (7.75)	5,4 (.213)	4,6 (.182)
44	2 3/4- 16 UN	71,4 (2.812)	21,4 (.844)	75,4 (2.969)	13,5 (.531)	196,9 (7.75)	5,4 (.213)	4,6 (.182)
48	3- 16 UN	77,8 (3.062)	21,4 (.844)	81,0 (3.188)	13,5 (.531)	196,9 (7.75)	5,4 (.213)	4,6 (.182)

Dimensions in brackets () are in inches.

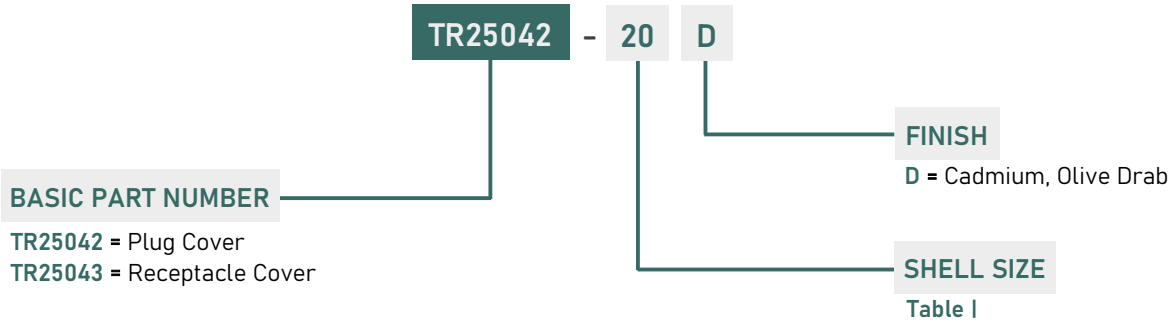